

2.00间距标准品弹簧针连接器

2.00 Pitch Standard Pogo pin connector

Note(注):


- To ensure the best usage, please operate it based on the working height.
(为保证最佳使用, 请根据工作高度进行操作)
- Based on the engineering drawings, shall not exceed the maximum allowed compression.
(根据工程图纸, 不得超过最大允许压缩)
- Material and coating conform to ROHS and REACH standards
(材料和涂层符合ROHS和REACH标准)
- @Key inspection dimension
(@为重点检验尺寸)
- Unit:mm
(单位:mm)

Materials:

- Insulator: Black High Temperature Resistant Plastics
(绝缘体: 黑色耐高温塑料)
- Turnings : Brass 0.125um Au over 1.5um~2.5um Ni
(车件: 黄铜 表面镀金5u 底层镀镍60u-100u)


Electrical(电气性能):

- Rated voltage: DC 12V ; Rated current: 3A Max.
(额定电压: DC 12V 额定电流: 最大3A)
- Contact resistance of SP1011-ring pin : 50 milliohm Max.
(单针接触阻抗: 最大50毫欧姆)

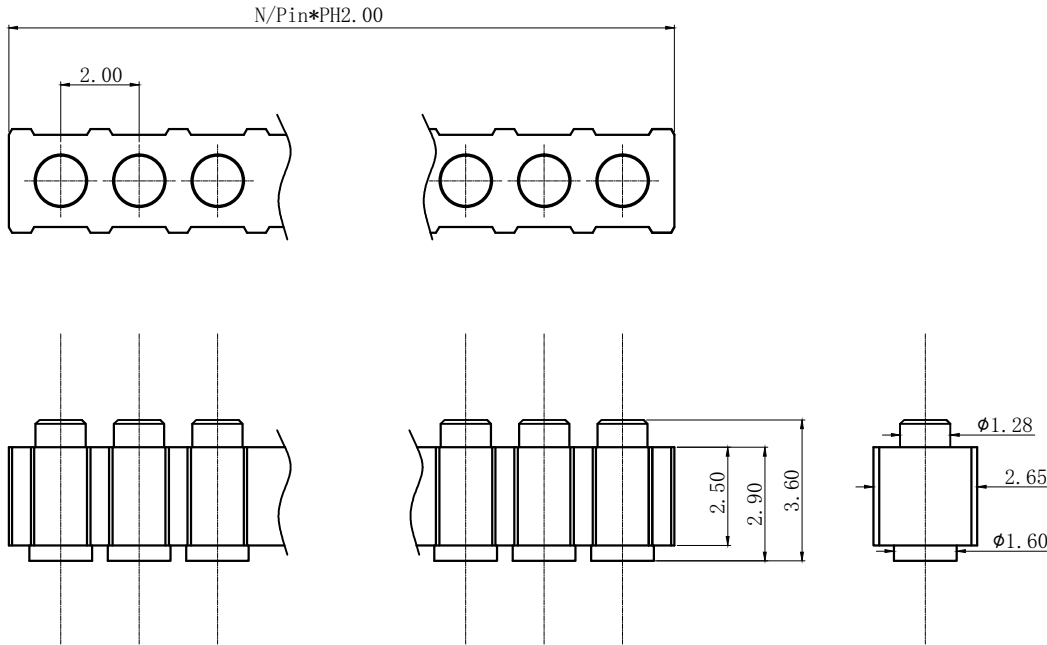


NO	Model (型号)	Total height (总高度)	BOM (物料编码)	
			Turning Parts (车针)	Housing <胶壳>
1	SFF301-ENN20005	3.6	SF301-W05	SHE-NN200

S F F XXX - E NN XXX SS

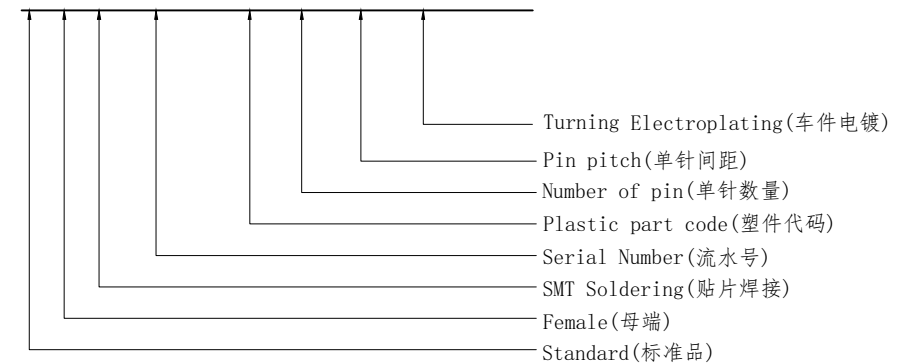

2.00间距标准品弹簧针连接器

2.00 Pitch Standard Pogo pin connector

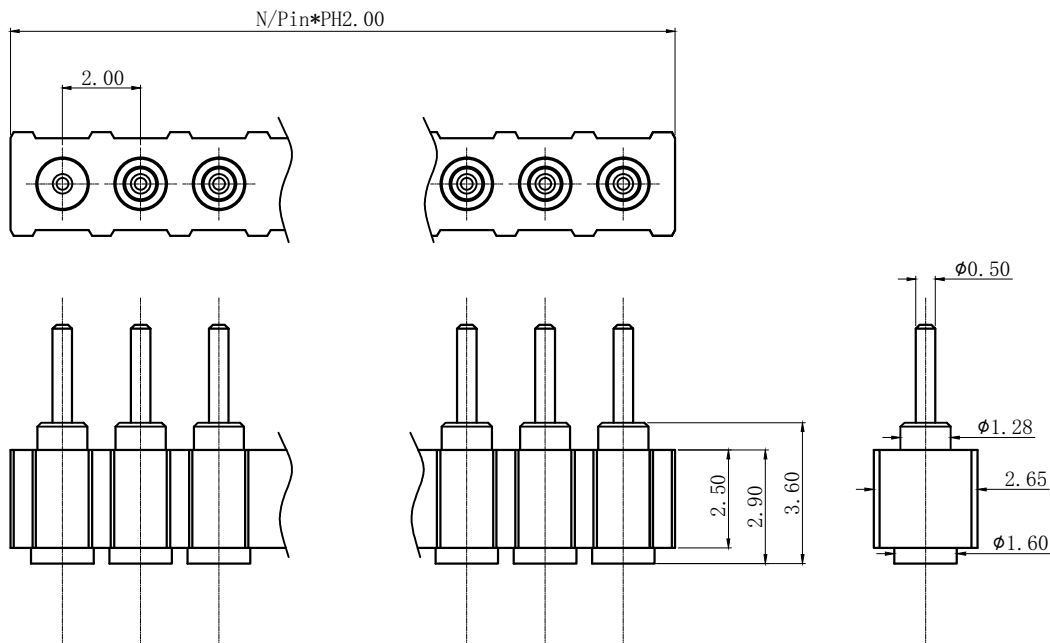

Note(注):

- To ensure the best usage, please operate it based on the working height.
(为保证最佳使用, 请根据工作高度进行操作)
- Based on the engineering drawings, shall not exceed the maximum allowed compression.
(根据工程图纸, 不得超过最大允许压缩)
- Material and coating conform to ROHS and REACH standards
(材料和涂层符合ROHS和REACH标准)
- @Key inspection dimension
(@为重点检验尺寸)
- Unit:mm
(单位:mm)

Materials:


- Insulator: Black High Temperature Resistant Plastics
(绝缘体: 黑色耐高温塑料)
- Turnings : Brass 0.125um Au over 1.5um~2.5um Ni
(车件: 黄铜 表面镀金5u 底层镀镍60u-100u)

Electrical(电气性能):

- Rated voltage: DC 12V ; Rated current: 3A Max.
(额定电压: DC 12V 额定电流: 最大3A)
- Contact resistance of SP1011-ring pin : 50 milliohm Max.
(单针接触阻抗: 最大50毫欧姆)


NO	Model (型号)	Total height (总高度)	BOM (物料编码)	
			Turning Parts (车针)	Housing <胶壳>
1	SFF302-ENN20005	3.6	SF302-W05	SHE-NN200

S F F XXX - A NN XXX SS

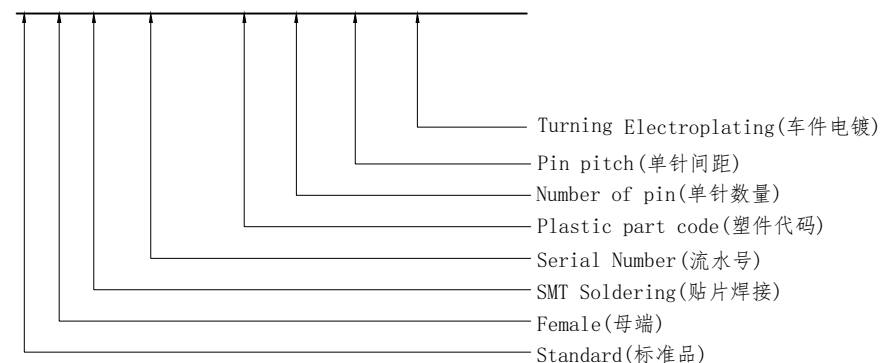

2.00间距标准品弹簧针连接器

2.00 Pitch Standard Pogo pin connector

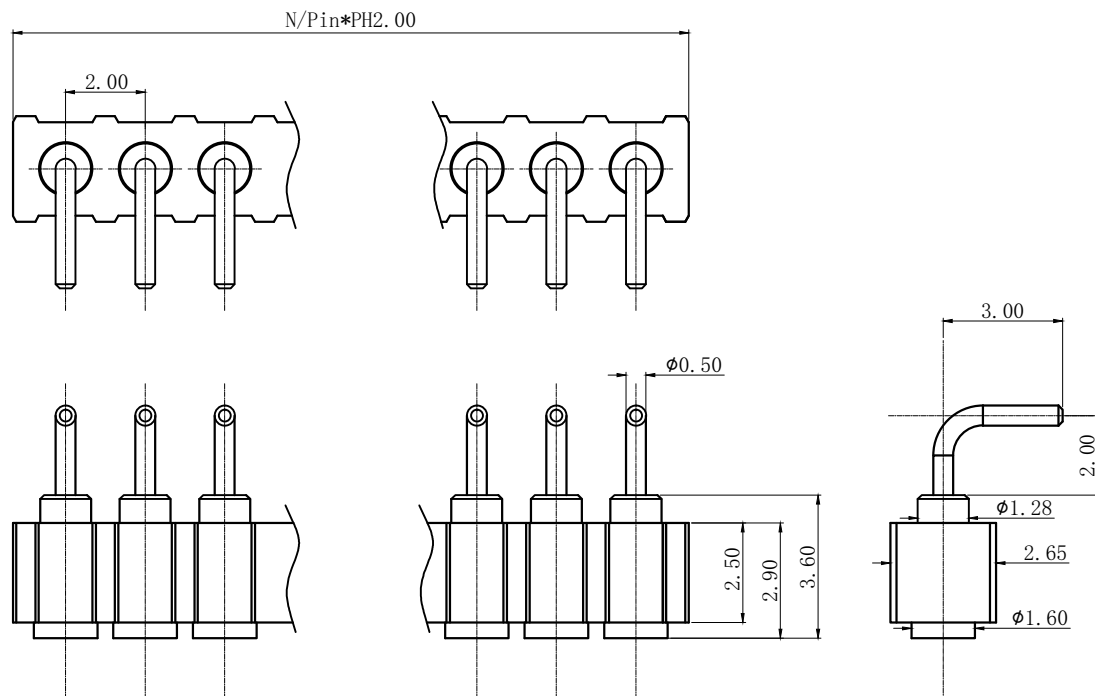

Note(注):

- To ensure the best usage, please operate it based on the working height.
(为保证最佳使用, 请根据工作高度进行操作)
- Based on the engineering drawings, shall not exceed the maximum allowed compression.
(根据工程图纸, 不得超过最大允许压缩)
- Material and coating conform to ROHS and REACH standards
(材料和涂层符合ROHS和REACH标准)
- @Key inspection dimension
(@为重点检验尺寸)
- Unit:mm
(单位:mm)

Materials:


- Insulator: Black High Temperature Resistant Plastics
(绝缘体: 黑色耐高温塑料)
- Turnings : Brass 0.125um Au over 1.5um~2.5um Ni
(车件: 黄铜 表面镀金5u 底层镀镍60u-100u)

Electrical(电气性能):

- Rated voltage: DC 12V ; Rated current: 3A Max.
(额定电压: DC 12V 额定电流: 最大3A)
- Contact resistance of SP1011-ring pin : 50 milliohm Max.
(单针接触阻抗: 最大50毫欧姆)


NO	Model (型号)	Total height (总高度)	BOM (物料编码)	
			Turning Parts (车针)	Housing <胶壳>
1	SFF302-ENN20005	3.6	SF302-W05	SHE-NN200

S F F XXX - A NN XXX SS

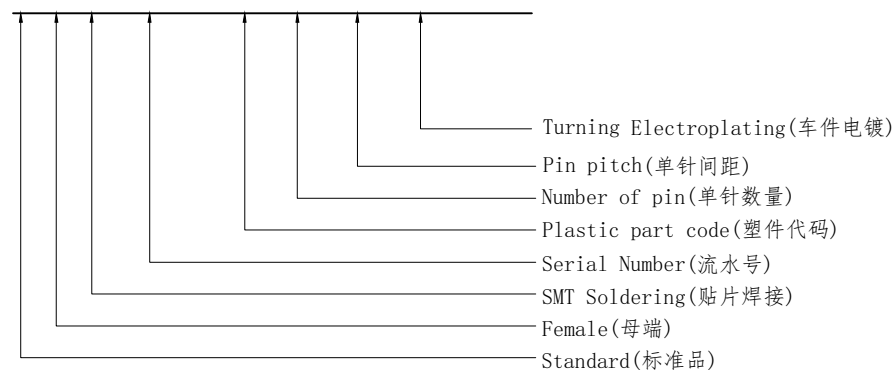

2.00间距标准品弹簧针连接器

2.00 Pitch Standard Pogo pin connector

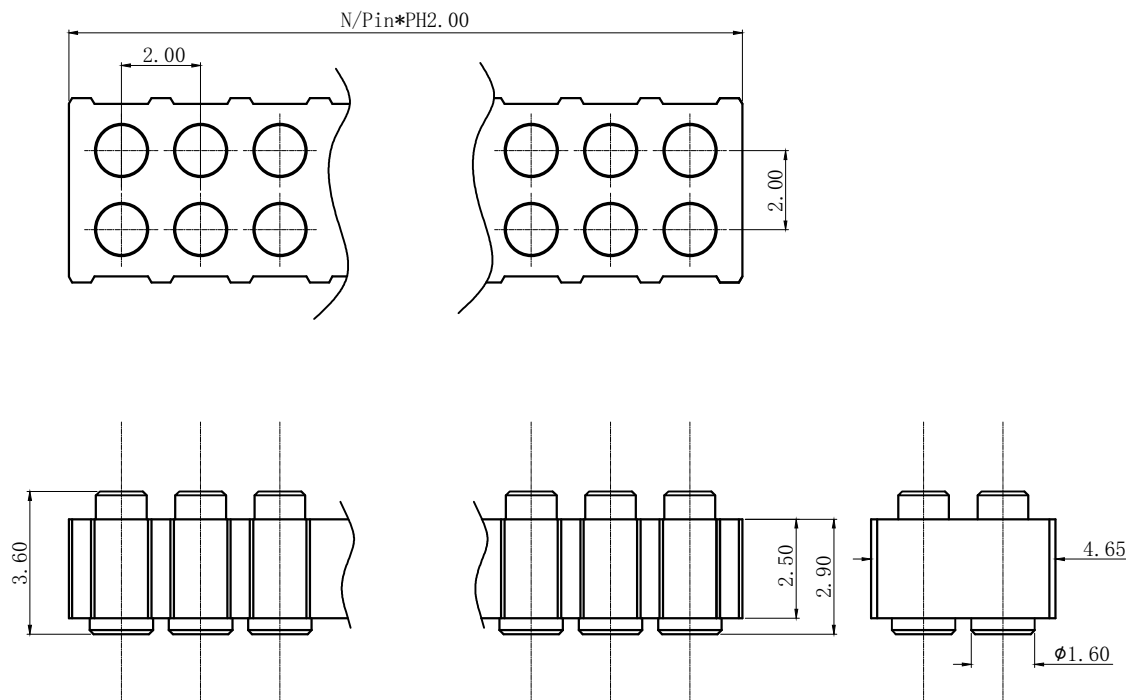

Note(注):

- To ensure the best usage, please operate it based on the working height.
(为保证最佳使用, 请根据工作高度进行操作)
- Based on the engineering drawings, shall not exceed the maximum allowed compression.
(根据工程图纸, 不得超过最大允许压缩)
- Material and coating conform to ROHS and REACH standards
(材料和涂层符合ROHS和REACH标准)
- @Key inspection dimension
(@为重点检验尺寸)
- Unit:mm
(单位: mm)

Materials:


- Insulator: Black High Temperature Resistant Plastics
(绝缘体: 黑色耐高温塑料)
- Turnings : Brass 0.125um Au over 1.5um~2.5um Ni
(车件: 黄铜 表面镀金5u 底层镀镍60u-100u)

Electrical(电气性能):

- Rated voltage: DC 12V ; Rated current: 3A Max.
(额定电压: DC 12V 额定电流: 最大3A)
- Contact resistance of SP1011-ring pin : 50 milliohm Max.
(单针接触阻抗: 最大50毫欧姆)


NO	Model (型号)	Total height (总高度)	BOM (物料编码)	
			Turning Parts (车针)	Housing <胶壳>
1	SFF301-FNN20005	3.6	SF301-W05	SHF-NN200

S F F XXX - F NN XXX SS

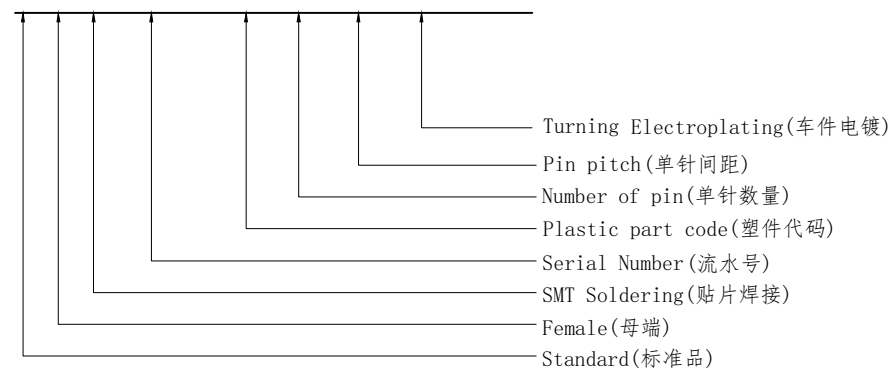

2.00间距标准品弹簧针连接器

2.00 Pitch Standard Pogo pin connector

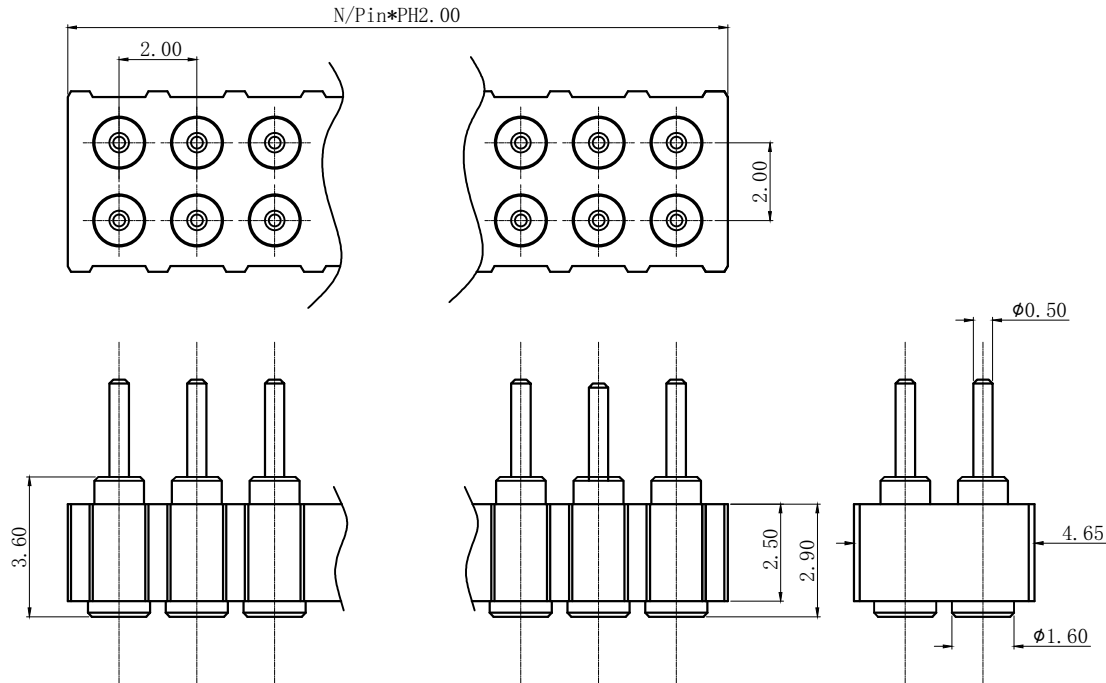

Note(注):

- To ensure the best usage, please operate it based on the working height.
(为保证最佳使用, 请根据工作高度进行操作)
- Based on the engineering drawings, shall not exceed the maximum allowed compression.
(根据工程图纸, 不得超过最大允许压缩)
- Material and coating conform to ROHS and REACH standards
(材料和涂层符合ROHS和REACH标准)
- @Key inspection dimension
(@为重点检验尺寸)
- Unit:mm
(单位:mm)

Materials:


- Insulator: Black High Temperature Resistant Plastics
(绝缘体: 黑色耐高温塑料)
- Turnings : Brass 0.125um Au over 1.5um~2.5um Ni
(车件: 黄铜 表面镀金5u 底层镀镍60u-100u)

Electrical(电气性能):

- Rated voltage: DC 12V ; Rated current: 3A Max.
(额定电压: DC 12V 额定电流: 最大3A)
- Contact resistance of SP1011-ring pin : 50 milliohm Max.
(单针接触阻抗: 最大50毫欧姆)

NO	Model (型号)	Total height (总高度)	BOM (物料编码)	
			Turning Parts (车针)	Housing <胶壳>
1	SFF301-FNN20005	3.6	SF301-W05	SHF-NN200


S F F XXX - F NN XXX SS

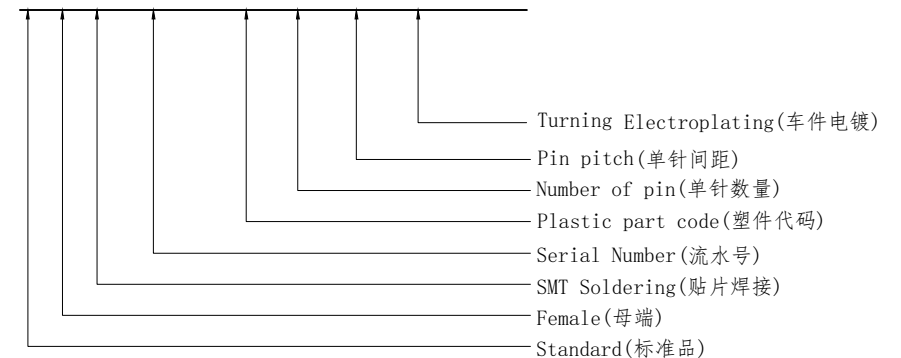



2.00间距标准品弹簧针连接器

2.00 Pitch Standard Pogo pin connector

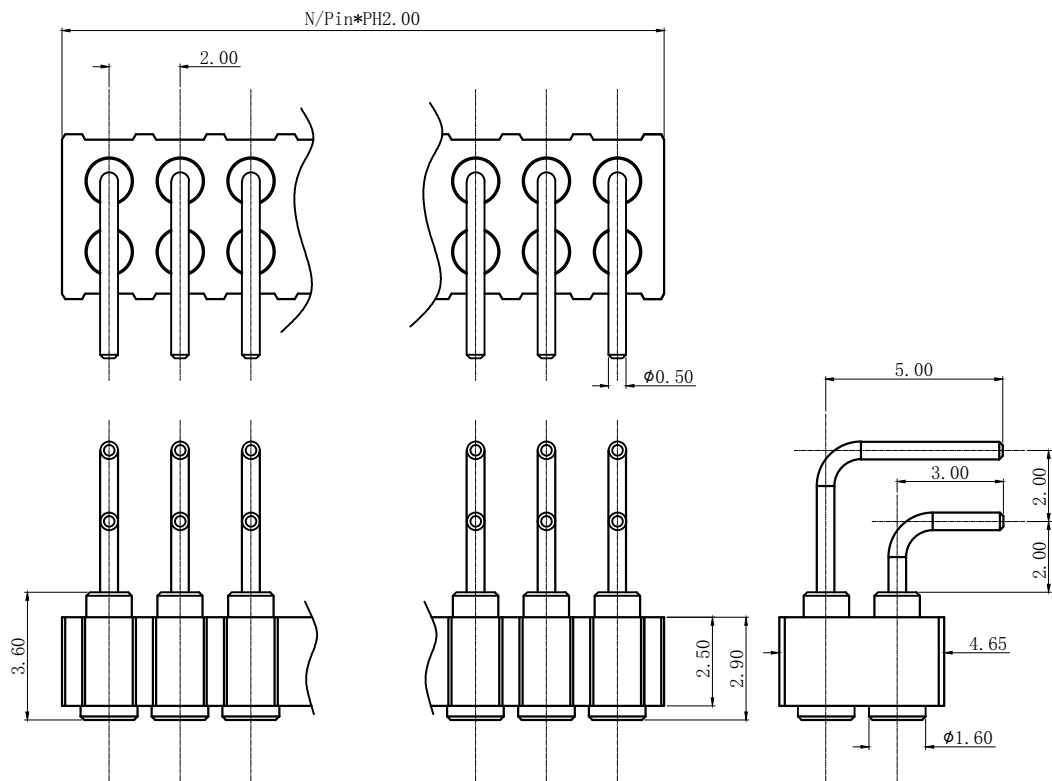

Note(注):

- To ensure the best usage, please operate it based on the working height.
(为保证最佳使用, 请根据工作高度进行操作)
- Based on the engineering drawings, shall not exceed the maximum allowed compression.
(根据工程图纸, 不得超过最大允许压缩)
- Material and coating conform to ROHS and REACH standards
(材料和涂层符合ROHS和REACH标准)
- @Key inspection dimension
(@为重点检验尺寸)
- Unit:mm
(单位:mm)

Materials:

- Insulator: Black High Temperature Resistant Plastics
(绝缘体: 黑色耐高温塑料)
- Turnings : Brass 0.125um Au over 1.5um~2.5um Ni
(车件: 黄铜 表面镀金5u 底层镀镍60u-100u)

Electrical(电气性能):

- Rated voltage: DC 12V ; Rated current: 3A Max.
(额定电压: DC 12V 额定电流: 最大3A)
- Contact resistance of SP1011-ring pin : 50 milliohm Max.
(单针接触阻抗: 最大50毫欧姆)

NO	Model (型号)	Total height (总高度)	BOM (物料编码)	
			Turning Parts (车针)	Housing <胶壳>
1	SFF302-FNN20005	3.6	SF302-W05	SHF-NN200

S F F XXX - F NN XXX SS

